

Quick-Lift Arm

QLA 100i

Intelligent lifting device which meets the highest standards of ergonomics, working environment, safety and efficiency.

Unique integrated mechanical, electric, pneumatic swivel simplifies use and minimizes maintenance.

Easy to use thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety achieved using our intelligent control systems.

The best auto balance available regardless of load weight.

High reliability and low power consumption results in superior cost efficiency.




BINAR

Improving your productivity

Quick-Lift Arm

QLA 100i

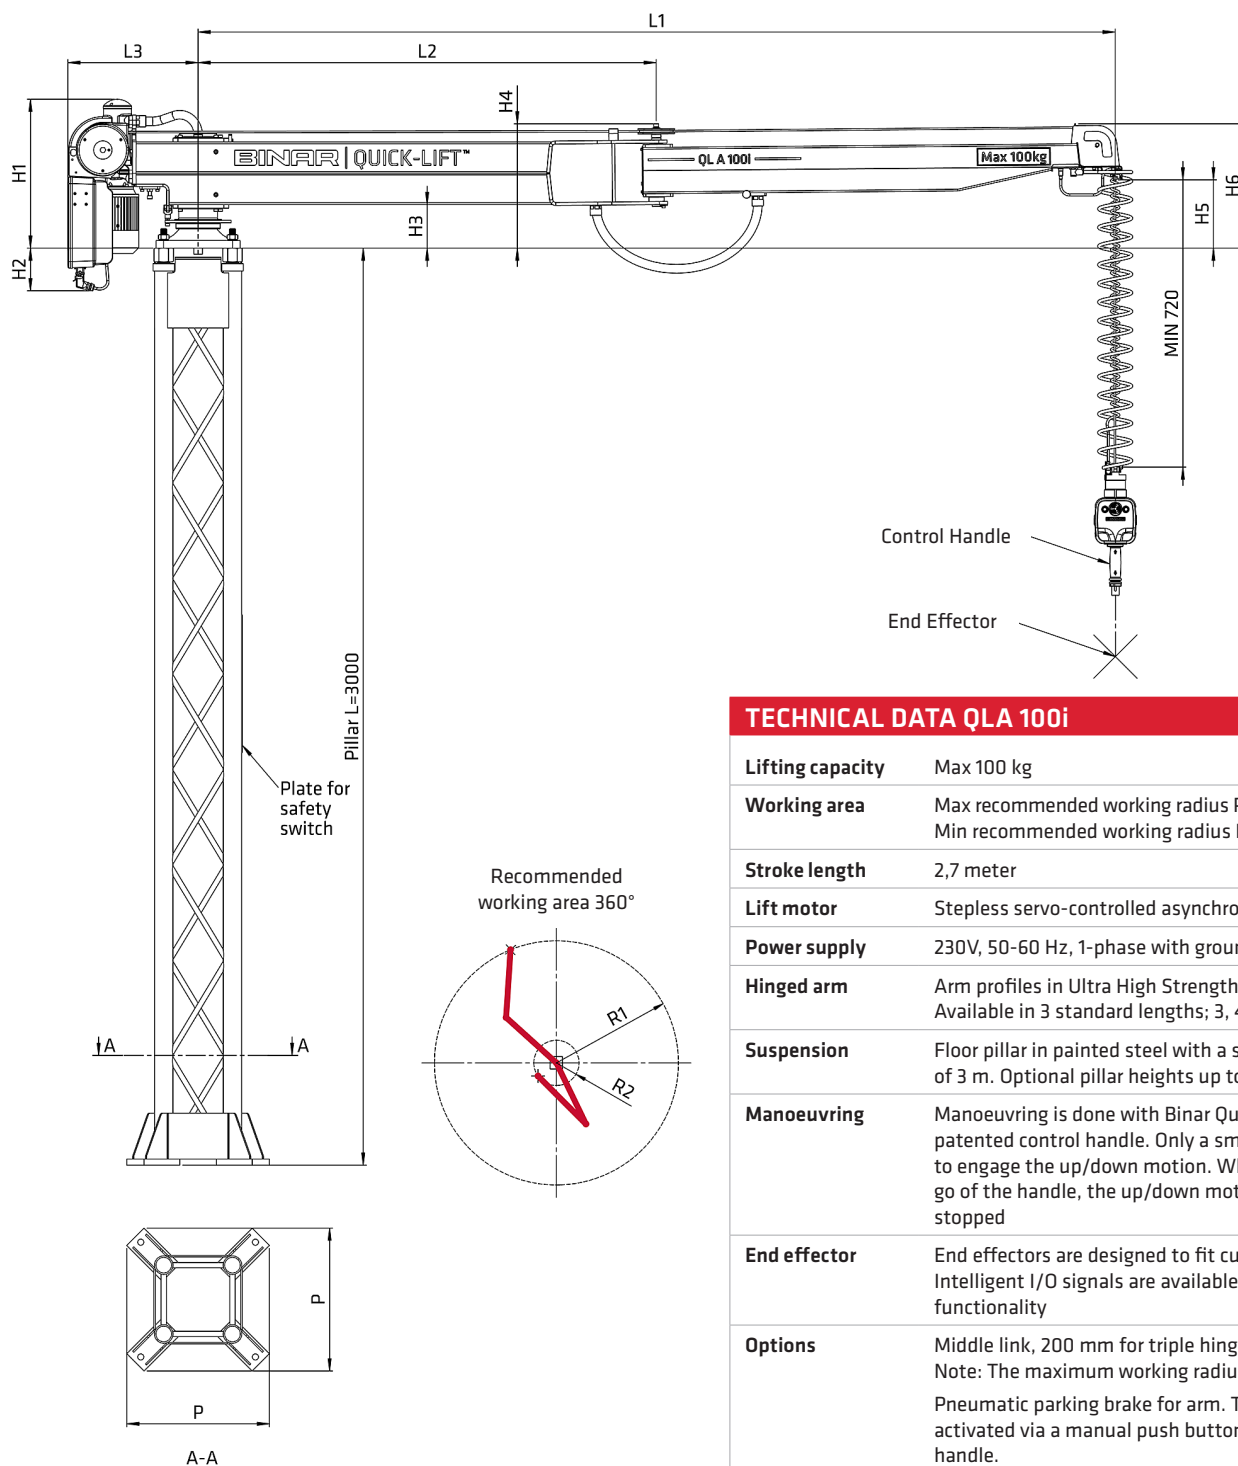

TECHNICAL DATA QLA 100i

Lifting capacity	Max 100 kg
Working area	Max recommended working radius R1 = L1 - 300 mm Min recommended working radius R2 = See chart
Stroke length	2,7 meter
Lift motor	Stepless servo-controlled asynchronous motor
Power supply	230V, 50-60 Hz, 1-phase with ground protection, 10A
Hinged arm	Arm profiles in Ultra High Strength Steel (UHSS) Available in 3 standard lengths; 3, 4 and 5 m
Suspension	Floor pillar in painted steel with a standard height of 3 m. Optional pillar heights up to 5 m
Manoeuvring	Manoeuvring is done with Binar Quick-Lifts patented control handle. Only a small force is needed to engage the up/down motion. When the operator let go of the handle, the up/down motion is immediately stopped
End effector	End effectors are designed to fit customers need. Intelligent I/O signals are available for optimum functionality
Options	Middle link, 200 mm for triple hinged arm. Note: The maximum working radius does not increase. Pneumatic parking brake for arm. The brake function is activated via a manual push button on the control handle. Middle link and pneumatic parking brake can not be combined.

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes

Product	Part.no	L1	L2	L3	H1	H2	H3	H4	H5	H6	P	R1	R2
QLA 100i 3m	013601	3000	1500	426	487	140	144	407	224	407	467	2700	500
QLA 100i 4m	013602	4000	2000	470	549	118	144	458	258	456	467	3700	900
QLA 100i 5m	013603	5000	2500	470	549	118	144	458	262	460	467	4700	1000

Pillar and control handle are ordered separately

Binar Quick-Lift Systems AB

Box 2014 • SE-461 11 TROLLHÄTTAN • Sweden
 telephone: +46 (0)520 47 40 00 • e-mail: info.quicklift@binar.se
 www.binarquicklift.com

BINAR
 Improving your productivity