Quick-Lift Arm

QLA 50i

Intelligent lifting device which meets the highest standards of ergonomics, working environment, safety and efficiency.

Unique integrated mechanical, electric, pneumatic swivel simplifies use and minimizes maintenance.

Easy to use thanks to outstanding responsiveness, regardless of load weight.

Exceptional safety achieved using our intelligent control systems.

The best auto balance available regardless of load weight.

High reliability and low power consumption results in superior cost efficiency.






Quick-Lift Arm

Plate for

switch

QLA 50i

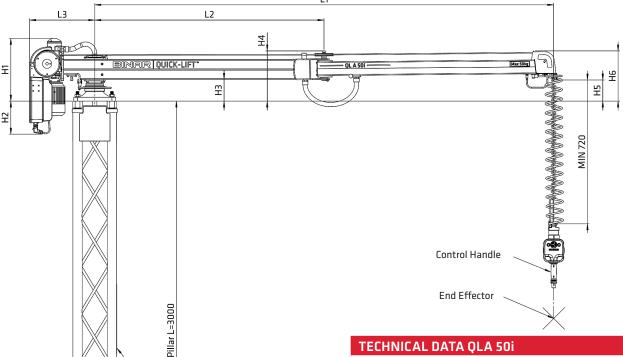

Recommended working area 360

Lifting capacity Max 50 kg Working area Max recommended working radius R1 = L1 - 300 mm Min recommended working radius R2 = See chart Stroke length Lift motor Stepless servo-controlled asynchronous motor Power supply 230V, 50-60 Hz, 1-phase with ground protection, 10A Hinged arm Arm profiles in Ultra High Strength Steel (UHSS) Standard length 3 m Suspension Floor pillar in painted steel with a standard height of 3 m. Optional pillar heights up to 5 m Manoeuvring is done with Binar Quick-Lifts Manoeuvring patented control handle. Only a small force is needed to engage the up/down motion. When the operator let go of the handle, the up/down motion is immediately stopped End effector End effectors are designed to fit customers need. Intelligent I/O signals are available for optimum functionality Options Middle link, 200 mm for triple hinged arm. Note: The maximum working radius does not increase. Pneumatic parking brake for arm. The brake function is activated via a manual push button on the control handle. Middle link and pneumatic parking brake can not be

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

combined.

Product	Part.no	L1	L2	L3	H1	H2	НЗ	H4	H5	Н6	Р	R1	R2
QLA 50i 3m	013600	3000	1500	426	410	217	142	329	138	329	467	2700	800

Pillar and control handle are ordered separately



A-A

Box 2014 • SE-46111 TROLLHÄTTAN • Sweden telephone: +46 (0)520 47 40 00 • e-mail: info.quicklift@binar.se www.binarquicklift.com

