## Quick-Lift Arm

#### QLAC 75i


Intelligent lifting device which meets the highest standards of ergonomics, working environment, safety and efficiency.







# Quick-Lift Arm

### QLAC 75i

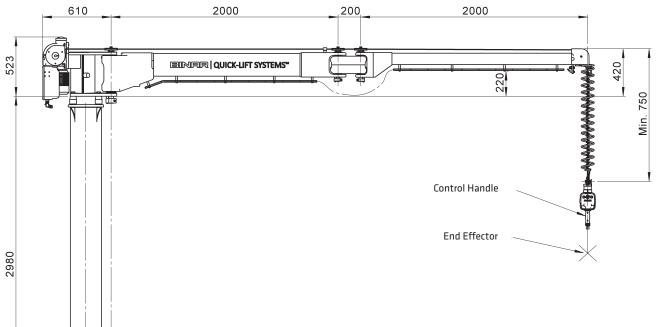



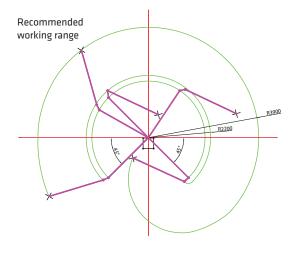

TECHNICAL D	ATA QLAC 75i
Lifting capacity	Max 75 kg
Lift motor	Stepless servo-controlled asynchronous motor.
Manoeuvring	Maneuvering is done with Quick-Lifts patented control handle. Only a force equivalent to 20 grams is needed to engage the up/down motion. When the operator let go of the handle, the up/down motion is immediately stopped.
Power supply	230V, 50-60 Hz, 1-phase with ground protection, 10A
Stroke length	2,7 meter
Hinged arm	Tripled hinged arm of anodized aluminum profiles. Length 4,2 m.
Suspension	Floor pillar in stainless steel with a height of 3 m.
End effector	End effectors are designed to fit customers need. Intelligent I/O signals are available for optimum functionality.
Daily care	Drive unit withstanding daily wash down and envi- ronments with temperatures up to 50° Celcius and a relative humidity of 80%. Handle and load cell box to be covered and protected against direct flushing.
	Detailed wash down instructions to be evaluated for each specific application.
	Use approved detergents for soft material. Check with your supplier.

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

#### Binar Quick-Lift Systems AB

Box 2014 • SE-46111 TROLLHÄTTAN • Sweden ph +46 (0)520 47 40 00 • e-mail info@binar.se web www.binarquicklift.com

