Vacuum End Effector

with tilt 85/60 kg

A tiltable end effector that, when integrated in Quick-Lift/ System™, meets the highest standards of ergonomics, working environment, safety and efficiency. Easy to use, thanks to outstanding responsiveness, regardless of load weight. Built in energy save function. Exceptional safety through built in warning function for insufficient vacuum, blow off and atmospheric pressure function. High cost efficiency through high reliability and long durability. A strong solution for quick and easy handling.




Vacuum End Effector


with tilt 85/60 kg

The figures are to be seen as indications and will vary depending on lifting object.







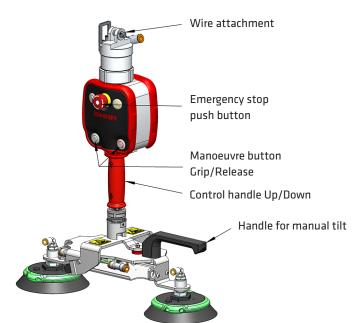

| Lifting Capacity | For normal use on flat, dense and not greasy |
|------------------|--|
| Litting capacity | materials. Recommended vacuum level at 60 kPa. |
| | Maximum lifting capacity Horizontal: 85 kg Vertical: 60 kg |
| Temperature | For lifting objects 0-90°C |
| Grippers weight | 9 kg / 20 lbs |
| Air supply | Clean dry air, filtered, pressure 6-8 bar |
| Safety | 2x safety has to be tested on each lifting object. |
| | Built in blow off function, atmospheric pressure function and warning for insufficient vacuum. |

Binar Quick-Lift Systems AB disclaims responsibility for any errors or incomplete information in the published material and reserves the right to make changes.

Binar Quick-Lift Systems AB

